

Bus protocol Cordset




TwoSided-Moulded Cordset



ISO 9001 (2015) QMS

Graph

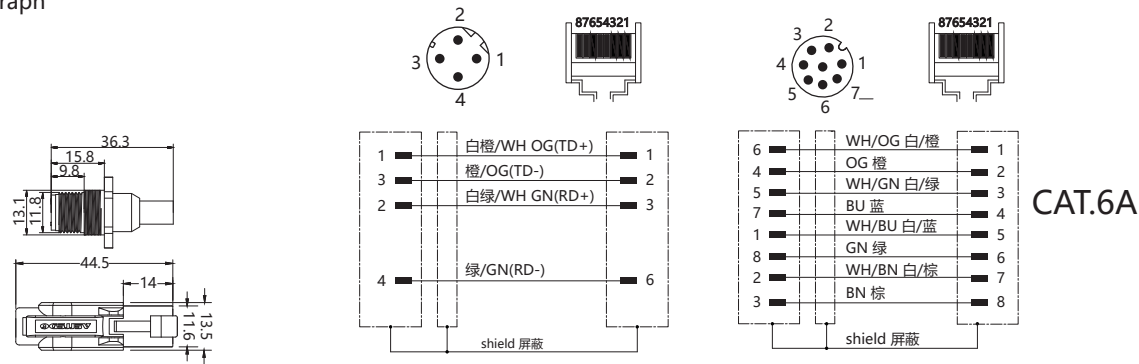

FixedMounting	DK	GN	3m	FLH-M12P-DM04/RJ45E4-3.0NIGD/BG	FLH-M12P-M08/RJ45E8-3.0NIGD/BG
FixedMounting	DK	GN	5m	FLH-M12P-DM04/RJ45E4-5.0NIGD/BG	FLH-M12P-M08/RJ45E8-5.0NIGD/BG
FixedMounting	DK	GN	10m	FLH-M12P-DM04/RJ45E4-10.0NIGD/BG	FLH-M12P-M08/RJ45E8-10.0NIGD/BG
MovableMounting	DK	GN	3m	FLH-M12P-DM04/RJ45E4-3.0NIYD/BG	FLH-M12P-M08/RJ45E8-3.0NIYD/BG
MovableMounting	DK	GN	5m	FLH-M12P-DM04/RJ45E4-5.0NIYD/BG	FLH-M12P-M08/RJ45E8-5.0NIYD/BG
MovableMounting	DK	GN	10m	FLH-M12P-DM04/RJ45E4-10.0NIYD/BG	FLH-M12P-M08/RJ45E8-10.0NIYD/BG
DragChain	DK	GN	3m	FLH-M12P-DM04/RJ45E4-3.0NITL/BG	FLH-M12P-M08/RJ45E8-3.0NITL/BG
DragChain	DK	GN	5m	FLH-M12P-DM04/RJ45E4-5.0NITL/BG	FLH-M12P-M08/RJ45E8-5.0NITL/BG
DragChain	DK	GN	10m	FLH-M12P-DM04/RJ45E4-10.0NITL/BG	FLH-M12P-M08/RJ45E8-10.0NITL/BG

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali

Voltage	MAX.60 V AC/DC	
Core cross-section	2*2*26AWG	4*2*26AWG
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85℃	



Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM