

Bus protocol Cordset



TwoSided-Moulded Cordset


CC-Link

屏蔽
Shield



ISO 9001 (2015) QMS

Graph

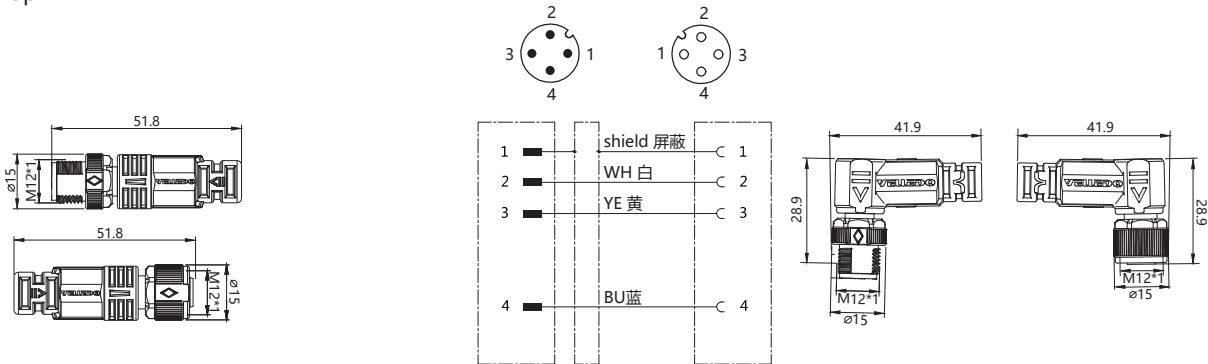

FixedMounting	红色3m	M12P-M04T/F04T-3.0CLGD/BN	M12P-M04S/F04S-3.0CLGD/BN
FixedMounting	红色5m	M12P-M04T/F04T-5.0CLGD/BN	M12P-M04S/F04S-5.0CLGD/BN
FixedMounting	红色10m	M12P-M04T/F04T-10.0CLGD/BN	M12P-M04S/F04S-10.0CLGD/BN
MovableMounting	红色3m	M12P-M04T/F04T-3.0CLYD/BN	M12P-M04S/F04S-3.0CLYD/BN
MovableMounting	红色5m	M12P-M04T/F04T-5.0CLYD/BN	M12P-M04S/F04S-5.0CLYD/BN
MovableMounting	红色10m	M12P-M04T/F04T-10.0CLYD/BN	M12P-M04S/F04S-10.0CLYD/BN
DragChain	红色3m	M12P-M04T/F04T-3.0CLTL/BN	M12P-M04S/F04S-3.0CLTL/BN
DragChain	红色5m	M12P-M04T/F04T-5.0CLTL/BN	M12P-M04S/F04S-5.0CLTL/BN
DragChain	红色10m	M12P-M04T/F04T-10.0CLTL/BN	M12P-M04S/F04S-10.0CLTL/BN

Length/Material Could be customized according to different enviroment ,like extrame tempreture and acid/alkali

Voltage	48 V AC	60 V DC
Core cross-section	3*0.75mm	
ProtectionClass(IEC 60529)	IP67	
Ambient temperature	-25~+85°C	



Data ,CAD,3D document please refer to: WWW.VELLEDQ.COM